DAV PUBLIC SCHOOL ARWAL

AT AMRA, ARWAL, BEFORE DRCC OFFICE, ARWAL BIHAR (804402)
ENGLISH MEDIUM CO-EDUCATIONAL SCHOOL
MANAGED BY: - DAV CMC, PAHARGANJ, NEW DELHI-110055
REGIONAL OFFICE: - DAV PUBLIC SCHOOLS, BIHAR ZONE-H, SASARAM (BIHAR)
Mob No:-9234004569, 8210649246 Email:-davarwal@gmail.com Website:www.davarwal.org
School Code: BR-069 PF Code:1011

Ref No:-DAV/ARWAL/2026-27/198 Date: 18/11/2026

WEB TENDER NOTICE

DAV Public School, Arwal, Bihar - 804402 invites quotation from the different parties (by email:davarwal@gmail.com or sealed envelopes at the above said address to construct **'Ramp and Stair Door Area'** inside school campus. The details of **specifications** are as follows:

1. **Construction of Ramp and Stair Door Area'**
2. **Area : 182.78 sq.feet**
3. **Total Area of Construction : 192.78 sq.feet**
4. **Total Cost of Construction : Rs. 158371/- (Including GST)** (Rs. One lac Fifty Eight thousand Three Hundred Seventy One only.)
5. **Materials Requirement for the construction:** As 'attached' as **'Annexure -1'** as specified by the 'Architect.

Requirements from the Agency:

6. Download the form and submit it to school with required details.
7. The **Copy of Registration** - if the agency is registered under **RTPS - 1 (Department of Labour)** of the Bihar State Government
8. Copy of **PAN Card &** a cancelled cheque with bank account details (Xerox copy of passbook - self attested must be attached)
9. **Address Proof** of the agency / **Id** proof of the owner.
10. **Stamp Paper** for agreement (only after selection of the quotation for the construction).
11. All terms & condition as specified as per the norms of **DAV Manual.**

Note: 1. Only registered agency require to submit the quotation. Please ensure, the agency filing the **IT Return** as per norms. **TDS** will be deducted on each payment (advance, or payment against bill of the work done or final payment).

2. **The 10% retention** money will be deducted on final payment and will be preserved for one year. It will be returned to the agency on approval of the architect after architectural verification of the constructed area.

PP: - Please use your agency "Letter Head" for the technical & financial bid.

Last Date: 30/11/2026 till 5.00p.m.

Date: 17.11.2026

Principal
Principal
DAV Public School
Arwal

WEB TENDER NOTICE

On behalf of DAV College Managing Committee, New Delhi, the school administration invites sealed financial or technical bid for –

1) Construction of Ramp and Stair Door
2) Total Area of Construction: 192.78 sq.feet
3) DAV Public School, Amra,Arwal (Bihar) on or before 30.11.2026 by 05:00 pm.
4) Estimated amount is Rs. 158371/- inclusive all GST.

DAV Public School,Amra,Arwal804402 (Bihar)

Visit Our Website for More Details- https:/davarwal.org

davarwal@gmail.com, Phone: 9234004569,8210649246

DAV PS ARWAL

TENDER FORM

Web Tender Notice, Ref. No.: .....Date:.....
Construction work as defined: .....
Name of the organization (with address) who invited tender: **DAV PUBLIC SCHOOL, ARWAL BIHAR**
Designated person who invited tender: **Principal, on behalf of 'Building Sub-committee**
Name of the website where tender invited:https/:davarwal.org
School's E-mail Id: davarwal@gmail.com

Agency Details:

1. Name of the agency: M/s .....
2. Address: .....
   .....Pin:.....Mobile .....
   Email Id ..... Website (if any) .....
3. Govt. Registration No • .....,
4. Date of Registration .....
5. No. of Years (Experience) in Construction Line .....
6. Whether self-attested copy of Registered Document is attached or not.....
7. PAN Details (of agency) .....
8. ID Proof of the owner: .....
9. Whether self-attested copy of ID Proof of the owner is attached or not .....
10. Address Proof of the agency (self-attested copy) .....

Other Details:

1. Total Amount of Construction (as mentioned in AD):.....
2. Amount Quoted (as asked): .....
3. Bank account Details of the agency: Type of Account (Saving/Current) .....
   a. Account No • .....
   b. Bank & Branch: .....
   c. IFS Code:.....

UNDERTAKING

I ..... am the owner of M/s ..... Read by web tender notice of the school on website : davsarwal.org for the 'CONSRUCTION' of ...., I assure that I will follow the norms of the school as may be defined under agreement (if assigned the construction work) and I assure that my agency will maintained the quality of materials to be used for the construction as specified by the architect in the specification details as attached as per **ANNEXURE 1.**

Mil

I assure that all information given as above is true. If any fallacy found in future, we will be held responsible for it.

Date: ..... Signature of the owner/ Partner with seal

(FOR OFFICE USE ONLY)

Remarks: We verified all documents submitted by the agency. We found it's quote is minimum / not supportive as per norms according to comparative. Hence, his proposal is

Date: ..... (Signature of Dealing Asst.)

Signature of the members of **Building Sub-committee:**

1. ....
2. ....
3. ....
4. ....
5. ....
6. ....

Date ...../...../..... **(Signature & Seal of the Principal)**

DRAFT

archgroup
architects , engineers,
interior designeres
507(A),GANGA-A,VASTU VIHAR,PH-VI,AIIMS-1,NH-139,NAUBATPUR RD,BHUSAULA,PATNA-801505,BIHAR,M-9973550049

REF:-DAV-AR/SB/RSD /01/26-27 Date:-1 NOV.2026


FOR TECHNICAL APPROVAL

ABSTRACT OF COST OF CONSTRUCTION OF RAMP & STAIR FRONT DOOR AT D.A.V. PUBLIC SCHOOL, ARWAL, AT AMRA, BIHAR.

Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.	Rate	Amount
		(1) RAMP & STAIR DOOR				-
		Area of Ramp & Stair door = 192.78 Sft (17.92 Sqm)				
		SECTION-I (EARTH WORK / SAND FILLING)				
1	2.8.	Earth work in excavation in foundation trenches or drains (not exceeding 1.5M in width or 10 sqm on plan) including dressing of sides and ramming of bottoms ,lift upto 1.5 M including getting out the excavated soil and disposal of surplus excava-ted soil as directed within a lead of 50 M.				
	2.8.1	All kinds of soil.	3.27	Cum		
2	2.26	Filling available excavated earth (excluding rock) in trenches, plinth, sides of foundations etc. in layers not exceeding 20cm in depth, consolidation each deposited layer by ramming and watering lead.	3.27	Cum		
3	2.28	Supplying and filling in plinth with local sand and under floors including watering, ramming, consolidating and dressing complete.	7.60	Cum		
		SECTION-II (R.C.C./P.C.C. WORK)				
4	4.1	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shutering - All work upto plinth level.				
	4.1.5	1:3:6 (1 cement, 3 coarse sand, 6 graded stone aggregate 20mm nominal size.)	0.41	Cum		
	4.1.3	1:2:4 (1 cement, 2 coarse sand, 4 graded stone aggregate 20mm nominal size.)	1.19	Cum		
		SECTION - III (MASONRY WORK)				
5	6.1A	Brick work with bricks of class designation 100A in foundations and plinth in				
	6.1.14A	Cement mortar 1:6 (1 cement:6 coarse sand)	3.71	Cum		
		SECTION-IV (FLOORING WORK)				
6	11.72	Providing designation 100A one brick flat soling joints filled with local sand including cost of watering, taxes, royalty all complete as per building specification and direction of E/I.	18.02	Sqm		
7	11.36	Providing and fixing first quality ceramic glazed wall tiles confirming to IS 15622(Thickness to be specified by manufacturer) of approved make in				

Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.	Rate	Amount
		all colours, shades execpt burgundy, bottle green, black of any size as approved by engineer in charge in skirting, risers of steps and dados over 12mm thick bed of cement mortor 1:3 (1 cement, 3 coarse sand) and jointed with grey cement slurry @ 3.3 Kg/sqm including pointing in white cement mixed with pigment of matching shade complete.	14.19	Sqm		
8	11.23	Marble stone flooring with 18 mm thick marble stone (sample of marble shall be approved by Engineer-in-charge) over 20 mm (average) thick base of cement mortar 1:4 (1 cement: 4 coarse sand) laid and jointed with grey cement slurry including rubbing and polishing complete with:				
	11.23.2	Rajnagar plain white marble 18 mm thick above 0.10 sqm upto 0.20 sqm	2.20	Sqm		
9	11.20	Chequerred precast cement concrete tiles 22mm thick with marble chips of size 6mm in footpath & courtyard jointed with neat cement slurry mixed with pigment to match the shade of tiles including rubbing and cleaning etc. complete on 22 mm thick bed of cement mortar 1:4 (1 cement: 4 coarse sand)				
	11.20.4	Ordinary cement without any pigment	15.59	Sqm		
		SECTION-V (PLASTER WORK)				
10	13.12	15 mm cement plaster on rough side of single or half brick wall of mix				
	13.12.4	1:6 (1 cement; 6 coarse sand).	15.49	Sqm		
		SECTION-VI (CARPENTARY,STEEL,HARDWARE)				
11	10.3	Providing and fixing in position collapsible steel shutters with vertical channels 20x10x2 mm and braced with flat iron diagonals 20x5 mm size with top and bottom rail of T-iron 40x40x6 mm with 40 mm dia steel pulleys complete with bolts nuts locking arrangement stoppers handles including applying a priming coat of approved steel primer.	7.86	Sqm		
		SECTION-VII (FINISHING WORK)				
12	13.81A	Distempering with 1st quality acrylic distemper, having VOC (Volitle Organic Compound) content less than 50 grams/ litre, of approved brand and manufacture, including applying additional coats wherever required to achieve even shade and colour				
	13.81.2B	Two coats	2.80	Sqm		
13	13.78	Applying one coat of cement primer of approved brand and manufacture on wall surface:				
	13.78.1	Cement primer	2.80	Sqm		

Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.	Rate	Amount
14	13.81	Applying priming coat:				
	13.81.4	With ready mixed zinc chromate yellow primer of approved brand and manufacture on steel				
		galvanised iron/steel works (second coat)	23.58	Sqm		
15	13.82	Painting with ready mixed paint of approved brand and manufacture in all shades to give an even shade.				
	13.82.1	New steel work (Two or more coats.)	23.58	Sqm		
		SECTION-VIII (STEEL WORK)				
16	MR	Providing and fixing stainless steel railing 3'-0" height on ramps as per direction of Engineer-in-charge.	11.75	Sqm		
		SECTION-IX (DISMANTLING WORK)				
17	MR	Dismantling of brickwall,door etc. and disposal of materials etc. complete.				
		TOTAL				
		ROUNDING OFF				
		Cost of construction per S.Ft.				

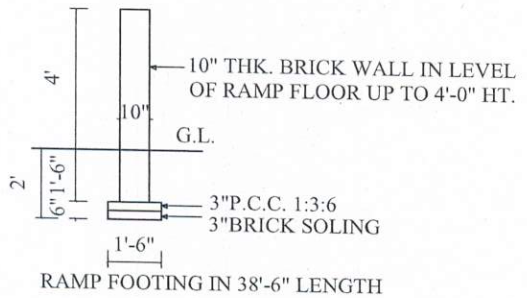


RAMP FOOTING IN 38'-6" LENGTH

NOTE:-

1.STAIR WALL & DOOR WILL BE DISMANTLED AND M.S. COLLAPSIBLE DOOR WILL BE FIXED.
2.RAMP WILL BE MADE WITH PROPER FOUNDATION.
3.S.STEEL RAILING WILL BE FIXED IN RAMP IN OUT SIDE AND OVER P.PROTECTION.
4.CHEQUERED TILES WILL BE FIXED ON P.C.C. 1:2:4 OVER B.F.SOLING OVER SAND FILL IN RAMP.
5.MARBLE WILL BE FIXED ON WALL DISMANTLED ON STAIR ENTRY.
6.WALL TILES WILL BE FIXED ON OUTER WALL & PLINTH PROTECTION WALL.
7.PAINTING OF COLLAPSIBLE & WALL PLASTERED WILL BE DONE.

CD = 12'-1"X7'-0"

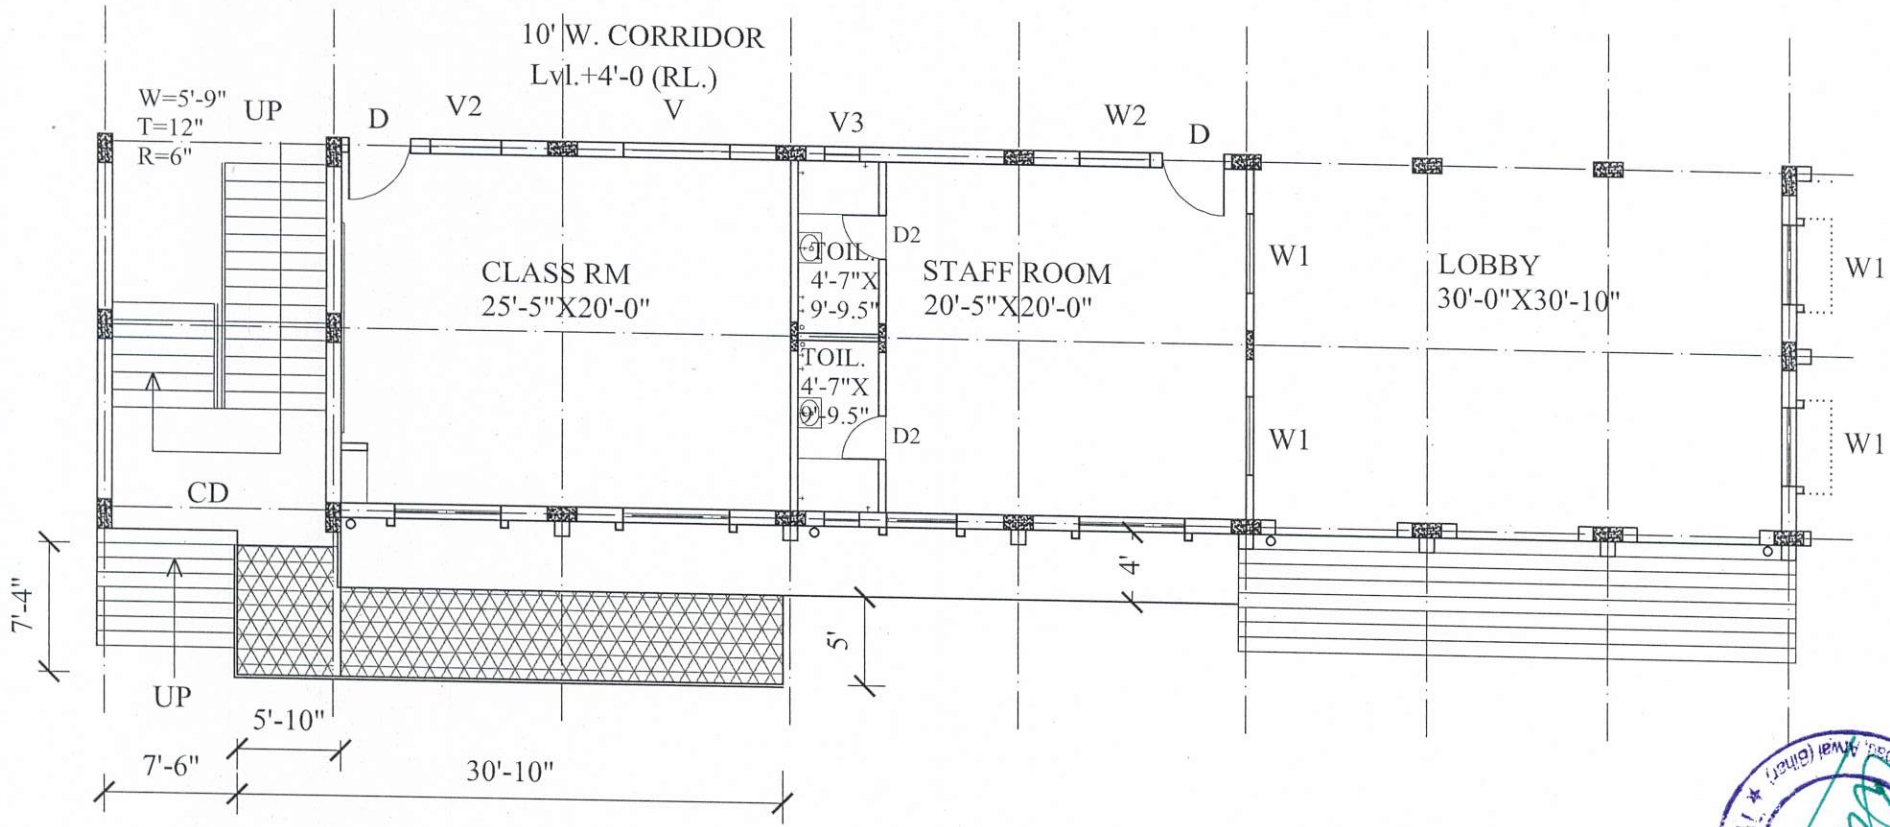

AREA OF RAMP & STAIR FRONT DOOR =192.78 SFT

PROJECT

PROPOSED RAMP & STAIR FRONT DOOR AT D.A.V. PUBLIC SCHOOL, ARWAL AT AMRA, ARWAL, BIHAR.

DRG. NO.-1

DATE OCT.-26

TITLE

RAMP & STAIR FRONT DOOR DET.

archgroup
architects, engineers,
interior designers,
507(A),VASTU VIHAR, PH-6,
AIIMS-1,NH-139,NAUBATPUR
ROAD,BHUSAULA,PATNA,
PIN-801505, Mob:-9973550049