DAV PUBLIC SCHOOL ARWAL

AT AMRA, ARWAL, BEFORE DRCC OFFICE, ARWAL BIHAR (804402)
ENGLISH MEDIUM CO-EDUCATIONAL SCHOOL
MANAGED BY: - DAV CMC, PAHARGANJ, NEW DELHI-110055
REGIONAL OFFICE: - DAV PUBLIC SCHOOLS, BIHAR ZONE-H, SASARAM (BIHAR)
Mob No:-9234004569, 8210649246 Email:-davarwal@gmail.com Website:www.davarwal.org
School Code: BR-069 PF Code:1011

Ref No:-DAV/ARWAL/2026-27/195 Date: 18 /11/2026

WEB TENDER NOTICE

DAV Public School, Arwal, Bihar - 804402 invites quotation from the different parties (by email:davarwal@gmail.com or sealed envelopes at the above said address to construct **'Interior of Library & Furniture,Almirah, A.C.Fitting '** inside school campus. The details of **specifications** are as follows:

1. **Construction of Interior of Library & Furniture,Almirah, A.C.Fitting**
2. **Area : 1556.74 sq.feet**
3. **Total Area of Construction : 1556.74 sq.feet**
4. **Total Cost of Construction : Rs. 648152/- & Rs.633000/- (Including GST)** Total (Rs. Twelve Lac Eighty One Thousand One Hundred Fifty Two Rupees only.)
5. **Materials Requirement for the construction:** As 'attached' as **'Annexure -1'** as specified by the 'Architect.

Requirements from the Agency:

6. Download the form and submit it to school with required details.
7. The **Copy of Registration** - if the agency is registered under **RTPS - 1 (Department of Labour)** of the Bihar State Government
8. Copy of **PAN Card &** a cancelled cheque with bank account details (Xerox copy of passbook - self attested must be attached)
9. **Address Proof** of the agency / **Id** proof of the owner.
10. **Stamp Paper** for agreement (only after selection of the quotation for the construction).
11. All terms & condition as specified as per the norms of **DAV Manual.**

Note: 1. Only registered agency require to submit the quotation. Please ensure, the agency filing the **IT Return** as per norms. **TDS** will be deducted on each payment (advance, or payment against bill of the work done or final payment).

2. **The 10% retention** money will be deducted on final payment and will be preserved for one year. It will be returned to the agency on approval of the architect after architectural verification of the constructed area.

PP: - Please use your agency "Letter Head" for the technical & financial bid.

Last Date: 05/12/2026 till 5.00p.m.

Date: 17.11.2026

Principal
Headmaster
DAV Public School
Amra (Arwal)

TENDER NOTICE

On behalf of DAV College Managing Committee, New Delhi, the school administration invites sealed financial & technical bid for –

1) Construction of '**Interior of Library & Furniture,Almirah & AC Fitting**'
2) Total Area of Construction: **1556.74 sq.feet**
3) DAV Public School, Amra,Arwal (Bihar) on or before 05.12.2026 by 05:00 pm.
4) Estimated amount is **Rs. 648152.00 & Rs.633000/-** inclusive all GST.

Please visit our website for details: https//:davarwal.org

DAV Public School

Amra,Arwal

804402 (Bihar)

davarwal@gmail.com, Phone: 9234004569,8210649246



TENDER FORM

Web Tender Notice, Ref. No.: .....Date:.....
Construction work as defined: .....
Name of the organization (with address) who invited tender: **DAV PUBLIC SCHOOL, ARWAL BIHAR**
Designated person who invited tender: **Principal, on behalf of 'Building Sub-committee**
Name of the website where tender invited:https/:davarwal.org
School's E-mail Id: davarwal@gmail.com

Agency Details:

1. Name of the agency: M/s .....
2. Address: .....
   .....Pin:.....Mobile .....
   Email Id ..... Website (if any) .....
3. Govt. Registration No • .....
4. Date of Registration .....
5. No. of Years (Experience) in Construction Line .....
6. Whether self-attested copy of Registered Document is attached or not.....
7. PAN Details (of agency) .....
8. ID Proof of the owner: .....
9. Whether self-attested copy of ID Proof of the owner is attached or not .....
10. Address Proof of the agency (self-attested copy) .....

Other Details:

1. Total Amount of Construction (as mentioned in AD):.....
2. Amount Quoted (as asked): .....
3. Bank account Details of the agency: Type of Account (Saving/Current) .....
   a. Account No • .....
   b. Bank & Branch: .....
   c. IFS Code:.....P_____

UNDERTAKING

I ..... am the owner of M/s ..... Read by web tender notice of the school on website : davsarwal.org for the 'CONSRUCTION' of ...., I assure that I will follow the norms of the school as may be defined under agreement (if assigned the construction work) and I assure that my agency will maintained the quality of materials to be used for the construction as specified by the architect in the specification details as attached as per **ANNEXURE 1.**

I assure that all information given as above is true. If any fallacy found in future, we will be held responsible for it.

Date: .....Signature of the owner/ Partner with seal

(FOR OFFICE USE ONLY)

Remarks: We verified all documents submitted by the agency. We found it's quote is minimum / not supportive as per norms according to comparative. Hence, his proposal is

Date: ..... (Signature of Dealing Asst.)

Signature of the members of **Building Sub-committee:**

1. .....
2. .....
3. .....
4. .....
5. .....
6. .....

.....
.....
.....
.....
.....
.....

Date ...../...../.....

(Signature & Seal of the Principal)

archgroup
architects , engineers,
interior designeres
507(A),GANGA-A,VASTU VIHAR,PH-VI,AIIMS-1,NH-139,NAUBATPUR RD,BHUSAULA,PATNA-801505,BIHAR,M-9973550049

REF:-DAV-AR/SB/ILB /01/26-27 Date:-31 JULY.2026

FOR TECHNICAL APPROVAL

ABSTRACT OF COST OF INTERIOR OF LIBRARY OF D.A.V. PUBLIC SCHOOL, ARWAL, AT AMRA, BIHAR.

Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.	Rate	Amount
		(1) INTERIOR OF LIBRARY				
		Area of Library = 1556.74 Sft (144.68 Sqm)				
		SECTION- I (ROOFING WORK)				
1	12.64	Providing and fixing 12 mm thick plaster of Paris (Gypsum anhydrous) ceiling tiles upto a height of 5 metres above floor level over wooden frames and rendered smooth with plaster of paris(frame work to be paid separetely)	179.78	Sqm		
2	12.62	Extra for any sunk or raised mouldings in the plaster of Paris (Gypsum anhydrous) ceiling.	35.72	Sqm		
3	21.5	Providing and fixing powder coated aluminium work (minimum thickness of powder coating 50 micron) consisting of tee/angle sections, of approved make confirming to IS:733 in frame of false ceiling including aluminium angle cleats with necessary C.P. brass/stain-less steel shunk screws, aluminium perimetre angles fixed to wall with stainless steel rawl plugs @ 450 mm centre to centre and fixing the frame work to G.I. level adjusting hangers 6 mm dia. With necessary cadmium plated machine screws all complete as per approved architectural drawings and direction of the Engineer-in-charge (level adjusting hangers, ceiling cleats and expansion hold fasteners to be paid for separetely).	120.00	Kg		
4	21.6	Providing and fixing 6 mm dia. G.I.level adjusting hangers (upto 1200 mm length), fixed to roof slabs by means of ceiling cleats made out of G.I. flat 40x3mm size 60 mm long and stainless steel expandable dash fastener of 12.5 mm dia and 50 mm long,complete as per direction of Engineer-in-charge.	117	No.		
		SECTION- II (FINISHING WORK)				
5	13.81A	Distempering with 1st quality acrylic distemper,having VOC (Volatile Organic Compound) content less than 50 grams/litre, of approved brand and manufacture, including applying additional coats wherever required to achieve even shade and colour.				
	13.81.2B	Two coats	241.73	Sqm		
6	13.78	Applying one coat of cement primer of approved brand				

Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.	Rate	Amount
		and manufacture on wall surface:				
	13.78.2	Distemper primer	241.73	Sqm		
7	13.80A.2	Providing and applying white cement based putty of average thickness 2 mm of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete.	241.73	Sqm		
		SECTION-III (CARPENTARY,STEEL,HARDWARE)				
8	9.101	Providing and fixing alluminium hanging floor door stopper anodised (anodic coating not less than grade AC 10 as per IS 1868) transparent or dyed to required colour and shade with necessary screws etc. complete.				
	9.101.2	Twin rubber stopper.	2	No.		
9	9.83	Providing and fixing aluminium die cast body tubular type universal hydraulic door closer (having brand logo with ISI, IS: 3564, embosed on the body, door weight upto 35 kg and door width upto 700 mm), with necessary accessories and screws etc. complete.	2	No		
10	9.43	Providing and fixing 18 mm thick, 150 mm wide pelmet of coir veneer board ISI marked IS: 14842, including top cover of 6 mm coir veneer board,nickle plated M.S.Pipe 20 mm dia, (heavy type) curtain rod with nickel plated brackets, including fixing with 25x3 mm M.S. Flat 10 cm long fixed to pelmet with hollock wood cleats of size 100 mm x 40 mm on both inner side of pelmet and raw plugs 75 mm long etc. all complete.	24.79	M		
11	9.44	Extra for using veneered particle board conforming to IS: 3097 Grade I, in item of pelmet 18 mm thick 150 mm wide.				
	9.44.2	Particle board with decorative veneering on both sides.	24.79	M		
		SECTION - IV (WOOD/TABLE WORK)				
12	9.169	Providing and fixing 19 mm thick both side balancing lamination factory pressed BWP grade marine ply as per IS 710 of approved brand boxes, shelves, racks, almirah, cupboard and drawer etc. including necessary nails, screws etc. complete as per direction of Engineer -in- charge.	121.17	Sqm		
13	9.174	Providing and fixing 2mm thick 16 to 19 mm wide PVC edge binding tape of approved quality for cupboard/ wardrobe shutters including necessary synthetic resin hot pressed to edges on binding machine etc. complete as per direction of engineer-in-charge.	120.00	Rm		
14	9.115	Providing and fixing poweder coated telescopic drawer channels 300 mm long with necessary screws etc. complete as per direction of Engineer-in-charge.	3	Each set		

Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.	Rate	Amount
		SECTION - V (ELECTRICAL WORK)				
15	1.1	Wiring for light point/fan point/exhaust fan point/ call bell point with 1.5 sq.mm FR PVC insulated copper conductor single core cable in surface/recessed medium class PVC conduit with piano type switch, phenolic laminated sheet, suitable size M.S./PVC box etc. as rquired.				
	1.1.3	Group 'C'	66.00	Point		
16	6.1	Supplying and fixing of following types lamp in the existing electrical fitting/fixtures etc. as required				
	6.1.4	5 watt CFL lamp	66.00	Point		
17	MR	Providing and fixing series light etc. complete as per direction of Engineer-in-charge	103.00	RM		
18	MR	Providing and fixing 2'x2' light in ceiling as per direction of Engineer-in-charge	5.00	Each		
		SECTION - VI (MISCELLANEOUS WORK)				
19	MR	Miscellaneous work and disposal of rubbish etc.	LS			
		TOTAL				
		ROUNDUP				
		Cost of construction per sqft.				
		2. FURNITURE, ALMIRAH & A.C. FITTING				
		Area of Computer room = 1550.10 Sft (144.06 Sqm)				
1	MR	Providing and fixing 1.5 Tonne split A.C. as per direction of Engineer-in-charge.	4.00	Each		
2	MR	Providing and fixing chairs with table as per direction of Engineer-in-charge.	62.00	Each		
3	MR	Providing and fixing M.S.Almirah 300x1200x1677mm for book storage as per direction of engineer-in-charge.	53.00	Each		
		TOTAL				
		ROUNDUP				


NOTES:-

1. LIGHT FIXTURES WILL BE WHITE AND COLORED.
2. LEVEL OF GYPSUM FALSE CEILING WILL BE AS PER DRG. FROM CEILING L.L.
3. DECORATIVE PELMET 150 MM WIDE WILL BE FIXED ON WINDOWS & DOORS.
4. ACRYLIC DISTEMPER 1ST QUALITY PAINT 2 COATS WILL BE DONE WITH A COAT OF PRIMER AND TWO COATS OF PUTTY.
5. FALSE CEILING WILL BE HANGED FROM R.C.C. CEILING BY 6 MM DIA. RODS AND STEEL FRAMING.
6. DOOR WILL BE FITTED WITH HYDRAULIC DOOR CLOSER & DOOR STOPPER.
7. ELECTRICAL WIRING WITH LIGHT FIXTURES WILL BE MADE.
8. BOTH SIDE LAMINATED TABLES OF SIZE 4'-0"X3'-0" AND CONNECTING CIRCULAR TABLE WILL BE MADE OF 2'-6" HT. AND OF FOOT REST AT 3" HEIGHT IN FULL WIDTH & LENGTH WITH 19 MM BOARD WITH CENTER & 17 WIDTH SUPPORT .
9. LIBRARIAN TABLE WILL BE MADE AROUND COLUMNS WITH 3 CABINETS,FOOT REST & 3 KEY BOARDS FOR COMPUTER. IN REMAINING AREA OF LIBRARIAN TABLE STORAGE SELF WILL BE MADE.
10. BOOK STORAGE WILL BE MADE OF A & B TYPE WITH BOTH SIDE LAMINATED 19 MM BOARD/STEEL ALMIRAH WITH GLAZED TOP SIDE OPEN COVER.
11. ALL WORK WILL BE MADE COMPLETELY OK.

AREA OF LIBRARY 56.74 SFT

W = 6'-0"X4'-11" M.S. GLAZERD+AL. GLAZED
W1 = 4'-4"X4'-11" M.S. GLAZERD+AL. GLAZED

BOOK STORAGE:-
A = 4'-0"X2'-0"X5'-6"
B = 4'-0"X1'-0"X5'-6"

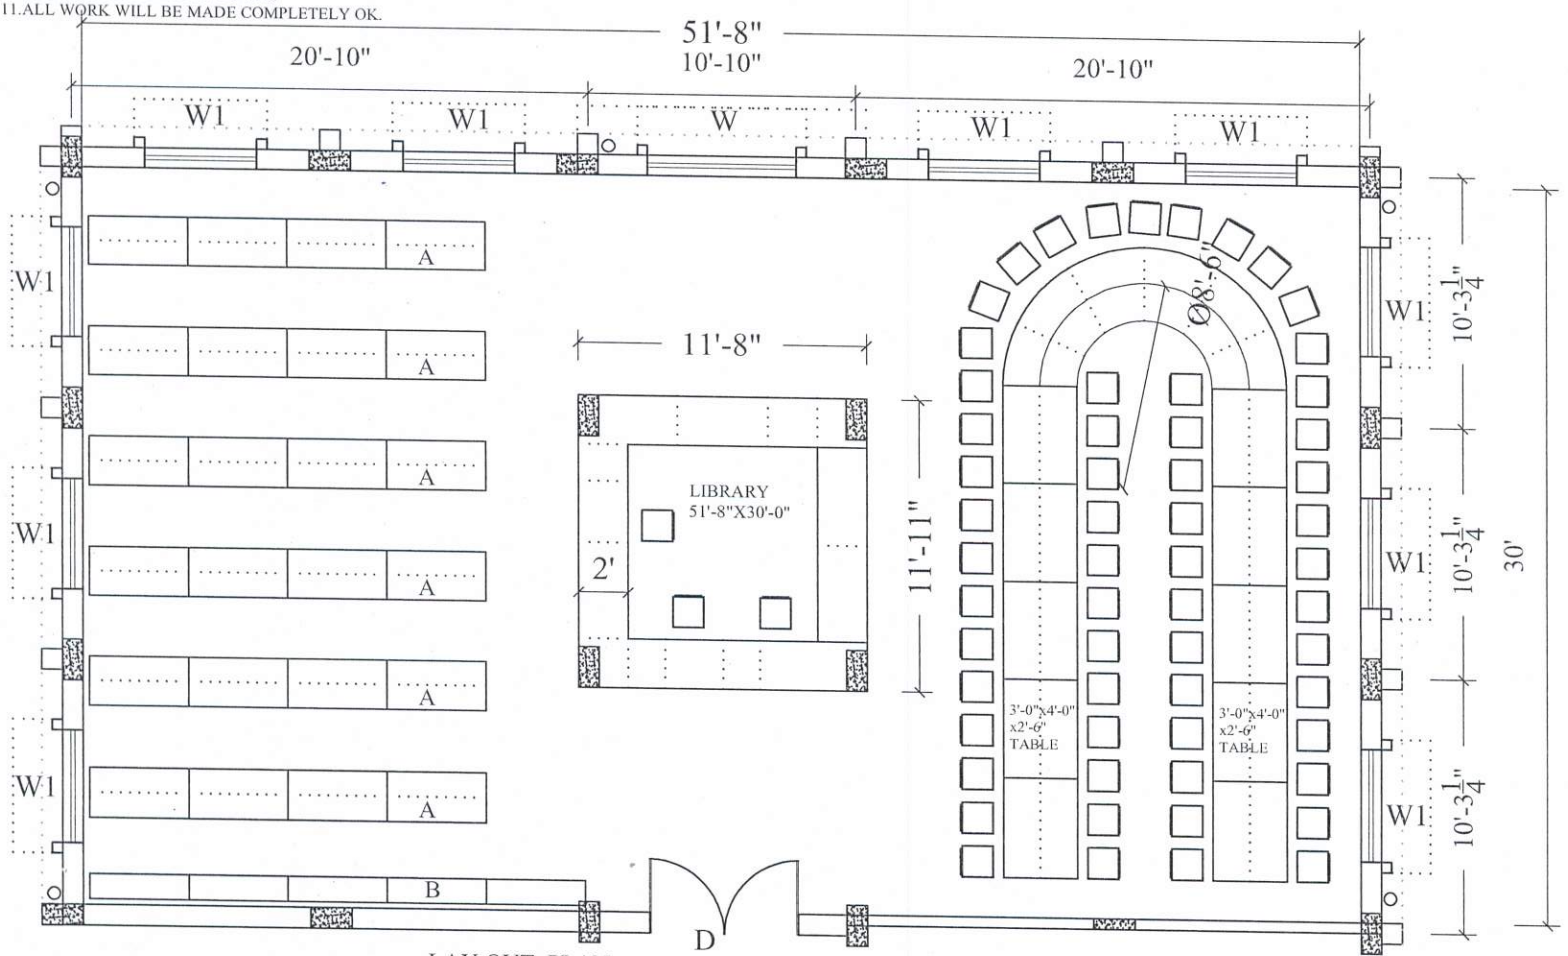

LAY OUT PLAN

PROJECT **PROPOSED INTERIOR OF LIBRARY AT 2ND FLOOR OF D.A.V. PUBLIC SCHOOL, ARWAL, AT AMRA, BIHAR.**	DRG. NO.-01	DATE JULY.-26	**archgroup** architects,engineers, interior designers, 507(A),VASTU VIHAR,PH-6, AIIMS-1,NH-139,NAUBATPUR ROAD,BHUSAULA DANAPUR, PATNA-801505, M-9430001170
	TITLE **LIBRARY** (2ND. FLOOR)		

NOTES:-


1. LIGHT FIXTURES WILL BE WHITE AND COLORED.
2. LEVEL OF GYPSUM FALSE CEILING WILL BE AS PER DRG. FROM CEILING LV
3. DECORATIVE PELMET 150 MM WIDE WILL BE FIXED ON WINDOWS & DOORS.
4. ACRYLIC DISTEMPER 1ST QUALITY PAINT 2 COATS WILL BE DONE WITH A COAT OF PRIMER AND TWO COATS OF PUTTY.
5. FALSE CEILING WILL BE HANGED FROM R.C.C. CEILING BY 6 MM DIA. RODS AND STEEL FRAMING.
6. DOOR WILL BE FITTED WITH HYDRAULIC DOOR CLOSER & DOOR STOPPER.
7. ELECTRICAL WIRING WITH LIGHT FIXTURES WILL BE MADE.
8. BOTH SIDE LAMINATED TABLES OF SIZE 4'-0"X3'-0" AND CONNECTING CIRCULAR TABLE WILL BE MADE OF 2'-6" HT. AND OF FOOT REST AT 3" HEIGHT IN FULL WIDTH & LENGTH WITH 19 MM BOARD WITH CENTER & 17 WIDTH SUPPORT .
9. LIBRARIAN TABLE WILL BE MADE AROUND COLUMNS WITH 3 CABINETS,FOOT REST & 3 KEY BOARDS FOR COMPUTER. IN REMAINING AREA OF LIBRARIAN TABLE STORAGE SELF WILL BE MADE.
10. BOOK STORAGE WILL BE MADE OF A & B TYPE WITH BOTH SIDE LAMINATED 19 MM BOARD/STEEL ALMIRAH WITH GLAZED TOP SIDE OPEN COVER.
11. ALL WORK WILL BE MADE COMPLETELY OK.

AREA OF LIBRARY = 1[illegible]74 SFT

W = 6'-0"X4'-11" M.S. [illegible]AZERD+AL. GLAZED
W1 = 4'-4"X4'-11" M.S. GLAZERD+AL. GLAZED

BOOK STORAGE:-
A = 4'-0"X2'-0"X5'-6"
B = 4'-0"X1'-0"X5'-6"

⊕ = CEILING LIGHT
L = 2'X2' CEILING LIGHT

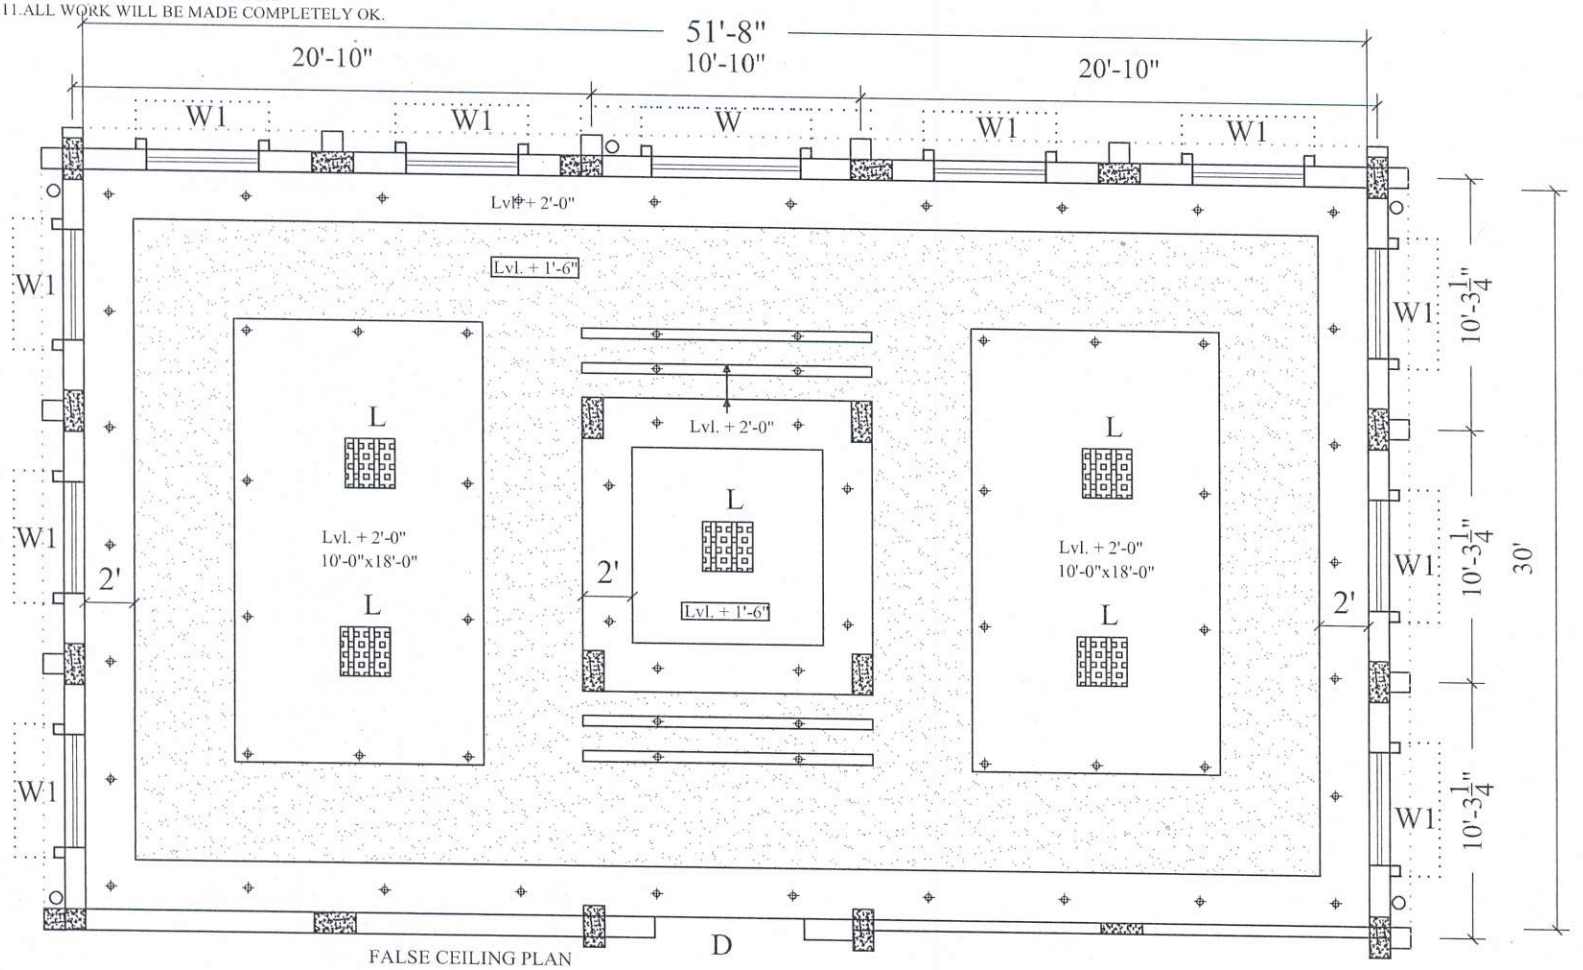

FALSE CEILING PLAN

PROJECT **PROPOSED INTERIOR OF LIBRARY AT 2ND FLOOR OF D.A.V. PUBLIC SCHOOL, ARWAL, AT AMRA, BIHAR.**	DRG. NO.-02	DATE JULY.-26	**archgroup** architects,engineers, interior designers, 507(A),VASTU VIHAR,PH-6, AIIMS-1,NH-139,NAUBATPUR ROAD,BHUSAULA DANAPUR, PATNA-801505, M-9430001170
	TITLE **LIBRARY** (2ND. FLOOR)		

D.A.V Public School