DAV PUBLIC SCHOOL ARWAL

AT AMRA, ARWAL, BEFORE DRCC OFFICE, ARWAL BIHAR (804402)
ENGLISH MEDIUM CO-EDUCATIONAL SCHOOL
MANAGED BY: - DAV CMC, PAHARGANJ, NEW DELHI-110055
REGIONAL OFFICE: - DAV PUBLIC SCHOOLS, BIHAR ZONE-H, SASARAM (BIHAR)
Mob No:-9234004569, 8210649246 Email:-davarwal@gmail.com Website:www.davarwal.org
School Code: BR-069 PF Code:1011

Ref No:-DAV/ARWAL/2026-27/...196 Date:18/11/2026

WEB TENDER NOTICE

DAV Public School, Arwal, Bihar - 804402 invites quotation from the different parties (by email:davarwal@gmail.com or sealed envelopes at the above said address to construct **'Interior of Composite Lab & Furniture '** inside school campus. The details of **specifications** are as follows:

1. **Construction of Interior of Composite Lab & Furniture**
2. **Area : 607 sq.feet**
3. **Total Area of Construction : 607 sq.feet**
4. **Total Cost of Construction : Rs. 421737/- & Rs.36000/- (Including GST)** Total (Rs. Four Lac Fifty Seven Thousand Seven Hundred Thirty Seven only.)
5. **Materials Requirement for the construction:** As 'attached' as **'Annexure -1'** as specified by the 'Architect.

Requirements from the Agency:

6. Download the form and submit it to school with required details.
7. The **Copy of Registration** - if the agency is registered under **RTPS - 1 (Department of Labour)** of the Bihar State Government
8. Copy of **PAN Card &** a cancelled cheque with bank account details (Xerox copy of passbook - self attested must be attached)
9. **Address Proof** of the agency / **Id** proof of the owner.
10. **Stamp Paper** for agreement (only after selection of the quotation for the construction).
11. All terms & condition as specified as per the norms of **DAV Manual.**

Note: 1. Only registered agency require to submit the quotation. Please ensure, the agency filing the **IT Return** as per norms. **TDS** will be deducted on each payment (advance, or payment against bill of the work done or final payment).

2. **The 10% retention** money will be deducted on final payment and will be preserved for one year. It will be returned to the agency on approval of the architect after architectural verification of the constructed area.

PP: - Please use your agency "Letter Head" for the technical & financial bid.

Last Date: 05/12/2026 till 5.00p.m.

Date: 17.11.2026

Principal
Principal
DAV Public School
Arwal

TENDER NOTICE

On behalf of DAV College Managing Committee, New Delhi, the school administration invites sealed financial & technical bid for –

1) Construction of **'Interior of Composite Lab & Furniture '**
2) Total Area of Construction: **607 sq.feet**
3) DAV Public School, Amra,Arwal (Bihar) on or before 05.12.2026 by 05:00 pm.
4) Estimated amount is **Rs. 421737/- & Rs.36000/-** inclusive all GST.

Please visit our website for details: https//:davarwal.org

DAV Public School

Amra,Arwal

804402 (Bihar)

davarwal@gmail.com, Phone: 9234004569,8210649246

TENDER FORM

Web Tender Notice, Ref. No.: .....Date:.....
Construction work as defined: .....
Name of the organization (with address) who invited tender: **DAV PUBLIC SCHOOL, ARWAL BIHAR**
Designated person who invited tender: **Principal, on behalf of 'Building Sub-committee**
Name of the website where tender invited:https/:davarwal.org
School's E-mail Id: davarwal@gmail.com

Agency Details:

1. Name of the agency: M/s .....
2. Address: .....
   .....Pin:.....Mobile .....
   Email Id ..... Website (if any) .....
3. Govt. Registration No • .....
4. Date of Registration .....
5. No. of Years (Experience) in Construction Line .....
6. Whether self-attested copy of Registered Document is attached or not.....
7. PAN Details (of agency) .....
8. ID Proof of the owner: .....
9. Whether self-attested copy of ID Proof of the owner is attached or not .....
10. Address Proof of the agency (self-attested copy).....

Other Details:

1. Total Amount of Construction (as mentioned in AD):.....
2. Amount Quoted (as asked): .....
3. Bank account Details of the agency: Type of Account (Saving/Current) .....
   a. Account No • .....
   b. Bank & Branch: .....
   c. IFS Code:.....P_____

UNDERTAKING

I ..... am the owner of M/s ..... Read by web tender notice of the school on website : davsarwal.org for the 'CONSRUCTION' of ...., I assure that I will follow the norms of the school as may be defined under agreement (if assigned the construction work) and I assure that my agency will maintained the quality of materials to be used for the construction as specified by the architect in the specification details as attached as per **ANNEXURE 1.**

I assure that all information given as above is true. If any fallacy found in future, we will be held responsible for it.

Date: .....Signature of the owner/ Partner with seal

(FOR OFFICE USE ONLY)

Remarks: We verified all documents submitted by the agency. We found it's quote is minimum / not supportive as per norms according to comparative. Hence, his proposal is

Date: ..... (Signature of Dealing Asst.)

Signature of the members of **Building Sub-committee:**

1. ....
2. ....
3. ....
4. ....
5. ....
6. ....


Date ...../...../..... **(Signature & Seal of the Principal)**

NOTES:-
1. DECORATIVE PELMET 150 MM WIDE WILL BE FIXED ON WINDOWS & DOORS.
2. ACRYLIC DISTEMPER 1ST CLASS PAINT 2 COATS WILL BE DONE WITH A COAT OF PRIMER AND TWO COATS OF PUTTY.
3. DOOR WILL BE FITTED WITH HYDRAULIC DOOR CLOSER & DOOR STOPPER.
4. BOTH SIDE LAMINATED C/B OF 19 MM GREEN BOARD WILL BE FIXED IN C/B.
5. ALUMINIUM SLIDING WINDOW WILL BE FIXED IN VENTILATOR.
6. BOTH SIDE LAMINATED TABLES WITH GRANITE TOP WILL BE MADE. SHELF WITH DOOR WILL BE MADE FOR EACH STUDENT IN TABLE. DRAWER WILL BE MADE FOR EACH STUDENT.
7. ALL WORK WILL BE MADE COMPLETELY OK.

AREA OF COMPOSITE LAB = 20'-0" X 30'-0" +2X3'-6"X1'= 607 SFT

D = 3'-6"X7'-10" WOODEN DOOR+AL. GLAZED
V1 = 4'-6"X2'-0" M.S. GRILL+AL. SLIDING
W1 = 4'-4"X4'-11" M.S. GLAZERD+AL. GLAZED

D.A.V Public School, Arwal
Code-R-069
Reg No.-BAR
Pvt-2016
Baldrabad, Arwal (Bihar)

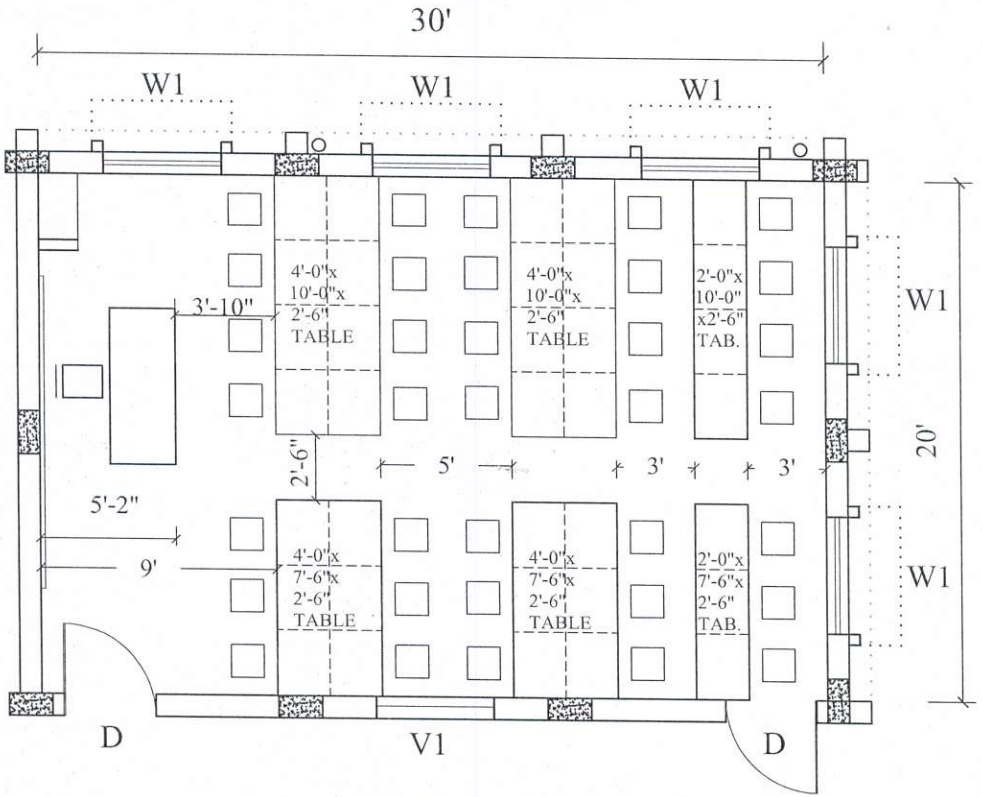

LAY OUT PLAN

PROJECT **PROPOSED COMPOSITE LAB AT THIRD FLOOR OF D.A.V. PUBLIC SCHOOL, ARWAL, AT AMRA, BIHAR.**	DRG. NO.-01	DATE AUG.-26	**archgroup** architects,engineers, interior designers, 507(A),VASTU VIHAR,PH-6, AIIMS-1,NH-139,NAUBATPUR ROAD,BHUSAULA DANAPUR, PATNA-801505, M-9430001170
	TITLE **COMPOSITE LAB** (3RD. FLOOR)		

archgroup
architects , engineers,
interior designeres
507(A),GANGA-A,VASTU VIHAR,PH-VI,AIIMS-1,NH-139,NAUBATPUR RD,BHUSAULA,PATNA-801505,BIHAR,M-9973550049

REF:-DAV-AR/SB/ICML /01/26-27 Date:-1 AUG.2026

FOR TECHNICAL APPROVAL

ABSTRACT OF COST OF INTERIOR OF COMPOSITE LAB OF D.A.V. PUBLIC SCHOOL, ARWAL, AT AMRA, BIHAR.

Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.	Rate	Amount
		(1) INTERIOR OF COMPOSITE LAB				
		Area of Composite lab = 607 Sft (56.41 Sqm)				
		SECTION- I (ALUMINIUM WORK)				
1	MR	Providing and fixing sliding Aluminium windows glazed using 4mm thick plain glass including necessary filling up the gaps at junctions i.e. top, bottom and sides with required EPDM rubber/neoprene gasket etc. Aluminum sections shall be smooth, rust free, straight mitred and jointed mechanically wherever required including cleat angles, Aluminium snap beading for glazing/anealing, C.P. brass/stainless screws, all complete as per architectural drawings and the directions of Engineer-in-charge	0.84	Sqm		
		SECTION- II (FINISHING WORK)				
2	13.81A	Distempering with 1st quality acrylic distemper,having VOC (Volatile Organic Compound) content less than 50 grams/litre, of approved brand and manufacture, including applying additional coats wherever required to achieve even shade and colour.				
	13.81.2B	Two coats	136.97	Sqm		
3	13.78	Applying one coat of cement primer of approved brand and manufacture on wall surface:				
	13.78.2	Distemper primer	136.97	Sqm		
4	13.80A.2	Providing and applying white cement based putty of average thickness 2 mm of approved brand and manufacturer, over the plastered wall surface to prepare the surface even and smooth complete.	136.97	Sqm		
		SECTION-III (CARPENTARY,STEEL,HARDWARE)				
5	9.101	Providing and fixing alluminium hanging floor door stopper anodised (anodic coating not less than grade AC 10 as per IS 1868) transparent or dyed to required colour and shade with necessary screws etc. complete.				
	9.101.2	Twin rubber stopper.	2	No.		
6	9.83	Providing and fixing aluminium die cast body tubular type universal hydraulic door closer (having brand logo with ISI, IS: 3564, embosed on the body, door				

Sl.No.	S.O.R.	DESCRIPTION	Qty.	Unit.	Rate	Amount
		weight upto 35 kg and door width upto 700 mm), with necessary accessories and screws etc. complete.	2	No	979.50	1959.00
7	9.43	Providing and fixing 18 mm thick, 150 mm wide pelmet of coir veneer board ISI marked IS: 14842, including top cover of 6 mm coir veneer board,nickle plated M.S.Pipe 20 mm dia, (heavy type) curtain rod with nickel plated brackets, including fixing with 25x3 mm M.S. Flat 10 cm long fixed to pelmet with hollock wood cleats of size 100 mm x 40 mm on both inner side of pelmet and raw plugs 75 mm long etc. all complete.	13.26	M	509.00	6749.34
8	9.44	Extra for using veneered particle board conforming to IS: 3097 Grade I, in item of pelmet 18 mm thick 150 mm wide.				
	9.44.2	Particle board with decorative veneering on both sides.	13.26	M	107.00	1418.82
		SECTION -IV (WOOD/TABLE WORK)				
9	9.169	Providing and fixing 19 mm thick both side balancing lamination factory pressed BWP grade marine ply as per IS 710 of approved brand boxes, shelves, racks, almirah, cupboard and drawer etc. including necessary nails, screws etc. complete as per direction of Engineer -in- charge.	137.76	Sqm	2490.60	343105.06
10	9.174	Providing and fixing 2mm thick 16 to 19 mm wide PVC edge binding tape of approved quality for cupboard/ wardrobe shutters including necessary synthetic resin hot pressed to edges on binding machine etc. complete as per direction of engineer-in-charge.	156.65	Rm	33.70	5279.11
		SECTION -V (STONE WORK)				
11	7.38	Stone tile work for wall lining/over table top upto 10.0 m height with special adhesive like araldite or equivalent over 12 mm thick bed of cement mortar 1:3 (1 cement: 3 coarse sand) including pointing in-white cement with an admixture of pigment to match the stone shade.				
	7.38.1	8 mm thick (mirror polished and machine cut edge)				
	7.38.1.1	Granite black stone	17.19	Sqm	1900.90	32676.47
		SECTION - VI (MISCELLANEOUS WORK)				
12	MR	Miscellaneous work and disposal of rubbish etc.	LS			1000.00
		TOTAL				421736.95
		ROUNDUP				421737.00
		Cost of construction per sqft.				694.79
		2. FURNITURE				
		Area of Computer room = 607 Sft (56.41 Sqm)				
1	MR	Providing and fixing chairs with table as per direction of Engineer-in-charge.	36.00	Each	1000.00	36000.00
		TOTAL				36000.00